

# Self-Regulating Heaters

**measurement**  
SPECIALTIES™


Positive Temperature Coefficient thermistors are truly remarkable for their ability to function as self-regulating heating elements. They can operate at a nearly constant temperature over a broad range of voltage and dissipation conditions. PTC heaters can be manufactured in many different configurations. These include discs, rectangles, squares, cylinders, and various shapes with holes to increase surface area. Multiple PTCs can be used in parallel to provide constant heating over a larger area.

## Features:


- No thermostat needed
- Virtually unlimited life
- No moving parts to wear
- Efficient
- Very low cost
- No electrical noise

## Typical Applications:

- IC heater
- Curling iron
- Hair dryer
- Hot melt glue gun
- Food warmer
- Diesel fuel heater
- Instrumentation heater
- Plug-in aroma heater
- Wax motor
- TCXO heater
- Liquid Crystal display
- Bimetal heater

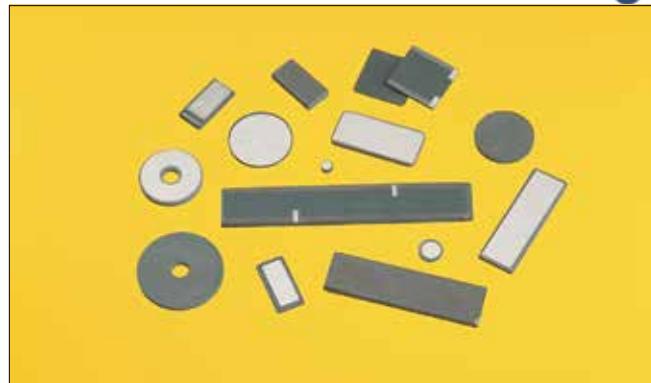

Self-Regulating Heaters

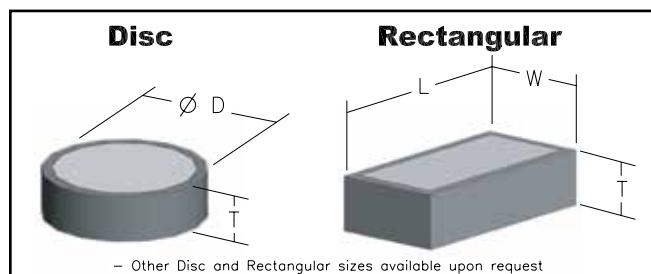

| Standard Rectangular PTC Heaters |                     |            |            |            |                            |                |
|----------------------------------|---------------------|------------|------------|------------|----------------------------|----------------|
| Switch Temp. $T_s$ (°C)          | $V_{max}$ * (volts) | L (inches) | W (inches) | T (inches) | $R_{25}^{**}$ ( $\Omega$ ) | MS Part #      |
| 50                               | 50                  | 0.472      | 0.236      | 0.050      | 10                         | PR425C050S101H |
| 90                               | 50                  | 0.472      | 0.236      | 0.050      | 10                         | PR425C090S101H |
| 135                              | 50                  | 0.472      | 0.236      | 0.050      | 10                         | PR425C135S101H |
| 50                               | 120                 | 0.472      | 0.236      | 0.100      | 70                         | PR421D050S701H |
| 90                               | 120                 | 0.472      | 0.236      | 0.100      | 70                         | PR421D090S701H |
| 135                              | 120                 | 0.472      | 0.236      | 0.100      | 70                         | PR421D135S701H |

| Standard Disc PTC Heaters |                     |            |            |                            |                |
|---------------------------|---------------------|------------|------------|----------------------------|----------------|
| Switch Temp. $T_s$ (°C)   | $V_{max}$ * (volts) | D (inches) | T (inches) | $R_{25}^{**}$ ( $\Omega$ ) | MS Part #      |
| 50                        | 50                  | 0.500      | 0.050      | 5                          | P5005C050S500H |
| 90                        | 50                  | 0.500      | 0.050      | 5                          | P5005C090S500H |
| 135                       | 50                  | 0.500      | 0.050      | 5                          | P5005C135S500H |
| 50                        | 120                 | 0.500      | 0.100      | 40                         | P5010D050S401H |
| 90                        | 120                 | 0.500      | 0.100      | 40                         | P5010D090S401H |
| 135                       | 120                 | 0.500      | 0.100      | 40                         | P5010D135S401H |

\*  $V_{MAX}$  = Maximum Voltage    \*\*  $R_{25}$  = Resistance at 25°C

| Other Available Rectangular Sizes |            |
|-----------------------------------|------------|
| L (INCHES)                        | W (INCHES) |
| 0.400                             | 0.200      |
| 0.472                             | 0.236      |
| 0.750                             | 0.350      |
| 0.985                             | 0.315      |
| 2.000                             | 0.350      |

| Other Available Disc Diameters |  |
|--------------------------------|--|
| DIAMETER (INCHES)              |  |
| 0.100                          |  |
| 0.160                          |  |
| 0.200                          |  |
| 0.250                          |  |
| 0.300                          |  |
| 0.350                          |  |
| 0.400                          |  |
| 0.500                          |  |
| 0.550                          |  |
| 0.600                          |  |
| 0.750                          |  |

| Other Available Switch Temperatures |  |
|-------------------------------------|--|
| Switch Temperature $T_s$ (°C)       |  |
| 40°C - 150°C                        |  |